




# FUJITSU Printer 9890S

## Boarding Pass & Baggage Tag Printer Module As General Purpose Printer Module For Airline Ticketing Self Service Solution

FUJITSU Printer 9890S is Airline Ticketing Printer Module for Self-Baggage Drop (SBD) and KIOSK. Utiliz FUJITSU's rich experiences and solution know-how in the field of airline printer environment, we have developed captioned new printer module by capturing latest requirements from end users and/or airlir solution providers.

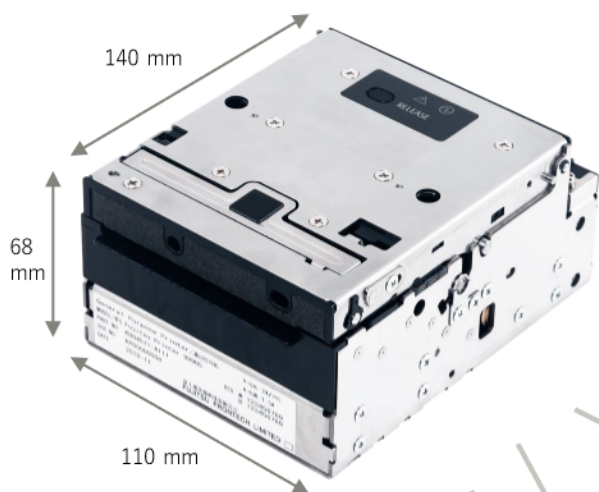

FUJITSU Printer 9890S  
KD04571- A101 (General)  
KD04571- A111 (Liner-less)

### Field Upgrade

- 1)RFID...Customers can be retrofitted when necessar need special skill. It can be added at the field by cus
- 2) Liner-Less...Customers can choose General model Liner-Less model. Even if Customers chose general n they can upgrade to Liner-Less model only by chang Platen Roller and Cutter Unit for Liner-Less.

### Satisfactory standard equipment

Cutter Unit, Cut& Cramp functions are standard equipmer

### Compact Size for Installation

This small size assists SBD/ KIOSK manufacturer to make machine smaller

### Versatile Interfaces

SITA CUTE, ARINC vMUSE: MUSE, cMUSE, Navitaire, Amad TravelSky, Microsoft Windows®  
\*find detail in next page

### Options




Cutter Unit (Genera

Cutter Unit for Line



RFID Option

Platen Roller (General)



Coated Platen Roller for Liner Less

shaping tomorrow with you

Product Brochure Fujitsu Printer 9890S

## Boarding Pass & Baggage Tag Printer

### Specifications

Physical Data	F9890S : W 110 – D 140 – H 68 (mm) / 1.4kg [W 4.4 – D 5.6 – H 2.7 (inch) / 3.1 lb] F9890S + RFID : W 110 – D 170 – H 68 (mm) / 1.6kg [W 4.4 – D 6.7 – H 2.7 (inch) / 3.6 lb]
Connectivity	USB 2.0 (F9890 has the virtual com for RS232C.)
Power Supply	24Vdc
Environment Installed	150W maximum at operation, 5.0W maximum at standby <ul style="list-style-type: none"> <li>• At operation : 5 to 40°C / 30 to 85%RH Alarm buzzer, 0 - 5,000m altitude</li> <li>• At storage : -5 to 50°C / 5 to 95%RH</li> </ul>
Easy Maintenance	The computer tool for diagnostic and test function Statistics data for transactions by log files Dot detection
Printer modules	<ul style="list-style-type: none"> <li>• Direct Thermal Resolution : 203dpi</li> <li>• Printer Line width : 80mm</li> <li>• Selectable Printer Speed : 5,6,7,8 inch/sec</li> <li>• Selectable Print Density</li> </ul>
Barcode	<ul style="list-style-type: none"> <li>• Conform to the ITPS* standard</li> <li>-1D : Interleaved 2 of 5 / Industrial 2 of 5 / Code 39 &amp; Code 128 / EAN 13</li> <li>-2D : PDF417 / Aztec / Data Matrix / QR</li> </ul>
Conformable Standards	Fully ITPS* compatible IATA Resolution 722e IATA Resolution 740 and 1740e
Data Interface	ITPS* standard Certified by : ARINC vMUSE / ARINC iMUSE / ARINC cMUSE/ Navitaire GoNow&NewSkies are compatible Will be certified by : SITA AirportConnect (CUTE) / SITA Liaison / Amadeus Air IT Americas EASE / Travelsky NEW APP / Travelsky Angel NEW APP / Microsoft Windows®driver for airline use ※Update sequentially
Agency Approvals	UL · cUL ※Updated sequentially

Option

RFID unit, Near-end sensor, AC Adaptor, USB2.0 Cable ASSY

\*Formerly known as AEA technical specif

---

Contact

**FUJITSU FRONTECH LIMITED**

Global Business Unit

1776 Yanokuchi, Inagi-shi, Tokyo 206-8555, Japan

URL: <https://www.fujitsu.com/jp/group/frontech/en/>

Inquiry: <https://www.fujitsu.com/jp/group/frontech/en/contact/>

---

© 2020 FUJITSU FRONTECH LIMITED

July 2020 FTGB-05-0