


SPRINTER



NEW GENERATION CHECK-IN PRINTER

ULTRA COMPACT FOOTPRINT
ROBUST DESIGN TO SUPPORT HIGH PRINTING VOLUME
EEZEETAGS LINERLESS COMPLIANT
RFID BAG TAG OPTION

easier
AIRPORT SOLUTIONS

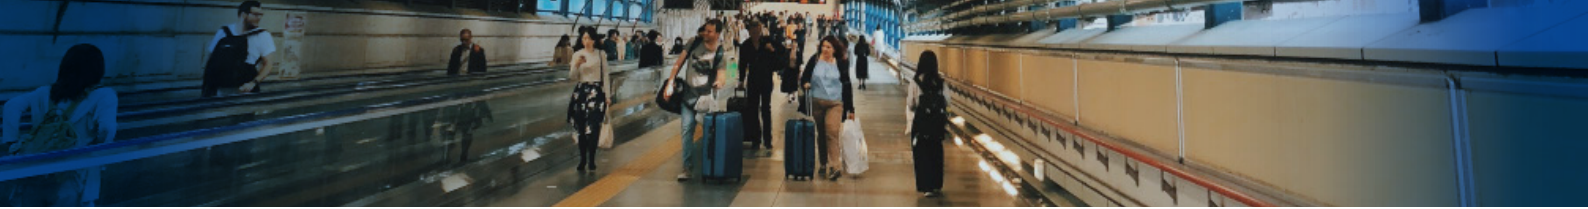

DESCRIPTION

The Sprinter is a last generation multi-functional, direct thermal printer for check in process.

It is specifically designed to bring the best cost of ownership for both common use and airlines dedicated environments. Its robust design makes it perfectly suitable for use in all airport sizes regardless of the printing volume requested.

Its very small footprint allows it to integrate easily into all check-in counters. Its optimized man-machine interface makes it very easy to use.

Its dual mode AEA application embedded on PC with Microsoft certified communication driver allows central remote administration at reduced cost.

KEY FEATURES

- Versatile single feed printer for boarding pass and bag tag
- Ultra compact, simple and robust design
- Fast and easy paper supply change
- Centralized software management: AEA software upgrade and reconfiguration based on standard Windows remote management tools
- Configuration, diagnostics and monitoring via web interface
- Certified with all major CUTE platforms
- ITPS / AEA 2018 ATB & Bag Tag
- USB and Ethernet IP Interfaces
- Eezeetag linerless compliant
- Tear off configuration
- Single paper roll holder (option)
- Boarding pass stacker (option)
- RFID Bag Tag (option)
- ATB1 Tray (option)

PRODUCT SPECIFICATIONS

PRINT METHOD	Thermal direct
PRINT DENSITY	203 dpi
SUPPORTED PROTOCOL	ITPS / AEA 2018 Windows certified Microsoft PC Driver
BARCODE PRINTING	All 1D and 2D barcodes including PDF417, Datamatrix, Aztec and QR code
GRAPHICAL USER INTERFACE	2 lines LCD display (16 characters per line)
CONNECTIVITY	1 x USB and 1 x RJ45 IP ethernet
PRINT SPEED	6 to 10 inches / second
PAPER SEPARATION	Cutter - Tear off/ Tear off only
PAPER LOADING	Automatic loading mechanism on paper detection (no paper waste)
PAPER FEED	1 feed
RFID BAG TAG (OPTIONAL)	UHF IATA 1740C compliant Gen2 Class 1
BOARDING PASS PAPER	Width: 24.5 to 83 mm Length: 100 to 203 mm Weight: 70g/m² to 255g/m²
BAG TAG PAPER	Width: 24.5 to 83 mm Length: 90 to 600 mm Weight: 70g/m² to 255g/m²
ROLL PAPER DIMENSION (OPTIONAL)	Diameter 200mm maximum
BOARDING PASS STACKER CAPACITY (OPTIONAL)	Up to 30 printed documents
DIMENSIONS (W x D x H)	150 x 215 x 155 mm 150 x 300 x 230 mm with optional roll holder
WEIGHT	2,2kg
POWER AUTORANGING	110 V/230 V - 50 Hz/60 Hz
OPERATING TEMPERATURE	+5°C to +45°C (20% to 80%, non condensing) Storage -20°C to +60°C
RELIABILITY MTBF MCBF PRINTHEAD	115,000 hours 350,000 cycles 150km printed or 100 million dots
AGENCY APPROVALS	CE, CB, UL, BIS, CCC pending
WARRANTY	1 year standard Up to 5 years option

Specifications are subject to change without prior notice and are not contractual. SPRINTER/EN/V1/06-2023.

