


FUJITSU Printer

DL3100

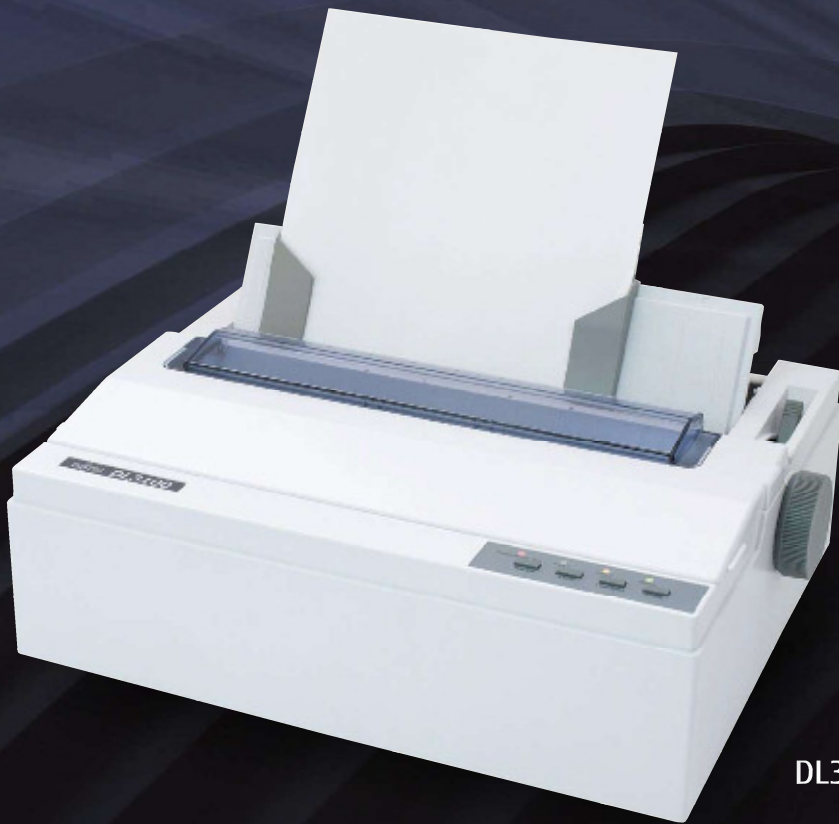

DL3100

Evolving the multi-purpose dot matrix printer

- 24 wire dot matrix printer
- Achieves incredible reliability
- Wide connectivity through different printer models
- Stylish compact design
- Amazing multi-copy capability

Best fit for your business partner



FUJITSU professional hardware



Variety of Paper Types


- Stock Forms (3.75 inch - 10.5 inch width)
 - Cut Sheet Papers (3.75 inch - 10.5 inch width)
 - Carbon Backed Papers. (2P - 6P)
- (Maximum copy ability is 6P under specific paper conditions.)



Compact design

The design of DL3100 was completely reviewed all the component.

DL3100 is achieved the compactness without any performance degradation

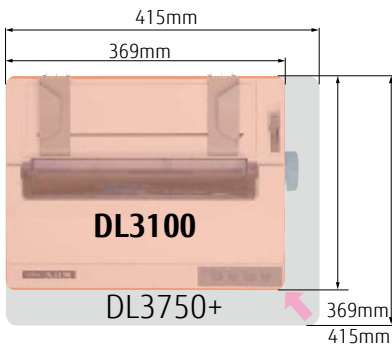

DL3100
369mm(W) x
283mm(D)

DL3750+
415mm(W) x
330mm(D)

24% smaller than the current model.

Easy operation

High Impact for Multiple Carbon Copies

The multiple carbon copies is up to 6 copies (1 original + 5 copies).

By this capability, DL3100 series covers the various business applications

Gap lever is easy to access and the setting change is easy.



24pins Print Head



Gap Lever




Paper Select Lever

Paper source selection

It is easy to select the paper source between the cut sheet and the continuous paper.

High speed printing

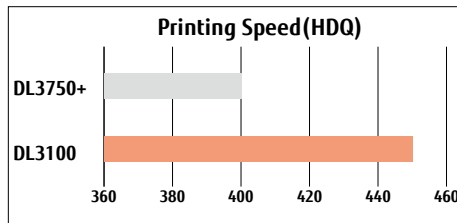

The maximum print speed is up to 450 cps at 10 cpi. This is achieved through the advanced head control technology.

Flexible connectivity ~ Interface support ~

~ Various interface model ~

Standard Interface is USB.

There are each interface model suitable for business as follows.

Interface Type

	USB	Centro	RS-232C	LAN
Standard model	✓			
Centro model	✓	✓		
RS-232C model	✓		✓	
LAN model	✓			✓


(*Interface type is the factory option. It can't change the interface type.)



USB



USB and Centro



USB and LAN




USB and RS-232C

FUJITSU ECO Friendly and Reliability


Energy saving

~ ECO & Saving printer's cost ~
DL3100 Series comply with the New Energy Star Program.
Also, The power consumption is 1.1W or less at the waiting mode and 37W or less at the operation (Average)

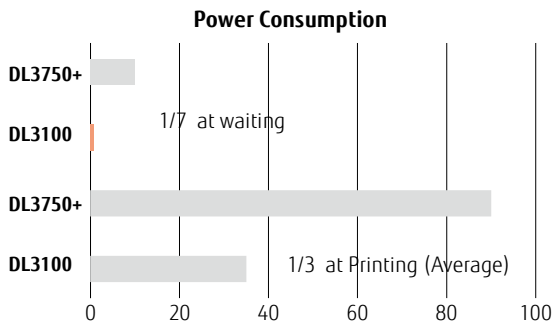

Reduced Operation Costs

~ Minimum run cost ~
Save money and reduce waste by using Fujitsu's ribbon. Ribbon replacement is quick and easy and does not require any tools.

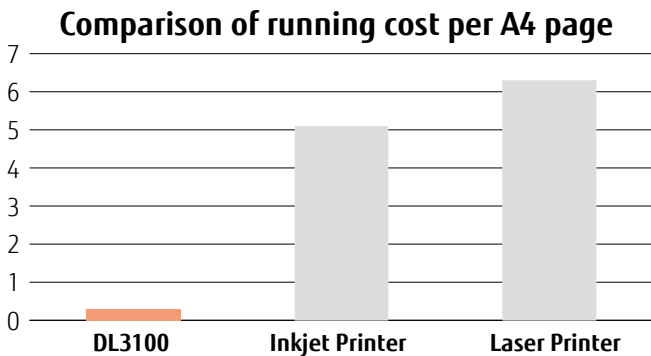

(*According to our calculations)

SIDM << Laser << Inkjet
0.3\$ 5.1\$ 6.3\$

The consumable costs per page are up to 20 time less than that of other printer types.
(SIDM : Serial Impact Dot Matrix Printer)




High reliability



Fujitsu printers are known for their reliability and longevity.
DL3100 series was extensively tested to ensure they meet Fujitsu's quality standards, and are ISO9001 certified

Covering safety standard for each region

~ Appropriate printer for international Business ~
FUJITSU Products covers safety standard for each region.
(*Safety standard is different depending on product)

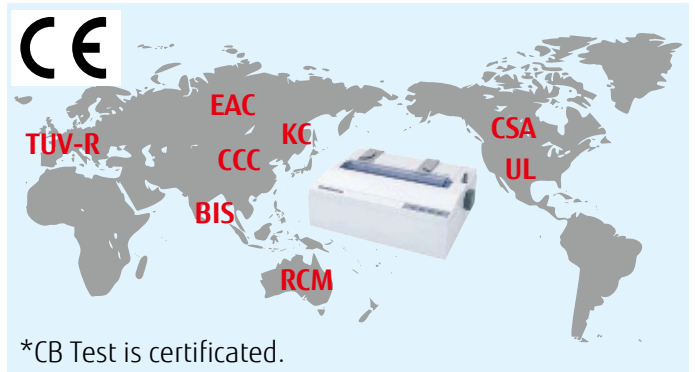

*CB Test is certificated.

More over, DL3100 series obtain the standards which are advantage for your business.

- Not containing Hazardous Substances
The DL3100 series is RoHS compliant and comply with Fujitsu's own strict environmental protection standards.
- Eco Mark Program
DL3100 series comply with the Eco Mark Program



Technical details

Model Name	DL3100	
Printing Technology	Bi-directional with logical seeking	
Print Head	24 wire, Impact Dot Matrix	
Wire Diameter	Standard	Φ0.20mm
Printing columns (10cpi)	80 column	
Speed	High Draft Quality	450cps (10cpi)
	Draft Quality	300cps (10cpi)
	Letter Quality	120cps (10cpi)
Resolution	360 x 360 dpi *1	
Copy Ability	Original + 5 carbonless copies *3	
Max. paper thickness	0.27mm (0.0106")	
Line Feed Speed	41.6ms per 1/6" line	
Form Feed Speed	4" per second continuous feed	
Continuous Form/Cut Sheet switch function	Manual	
Paper thickness adjust function	Manual	
Interface	USB	USB Ver.2.0 (TYPE B)
	Parallel	IEEE1284 Nibble Mode
	Serial	RS232C 25pin
	LAN	10BASE-T, 100 Base-TX, TCP/IP Protocol
Emulation	EPSON ESC/P2, IBM 2390	
Printer Driver	Microsoft Windows Driver Available	
Input Buffer	Max. 256KB	
Input Voltage	100V AC to 120V AC ±10%, single phase, 50Hz to 60Hz	
	220V AC to 240V AC ±10%, single phase, 50Hz to 60Hz	
Consumption Power	Stand by	1.4W or Less
	Average	34W
Environmental Conditions	5°C to 38°C(41°F to 95°F), 20~80%RH (Non-condensing)	
Dimension (WxDxH)	369 x 283 x 146mm	
Weight	Approx. 5.5Kg	
Noise	Approx. 57dBA / 54dBA(Low noise mode)	
Reliability	MTBF	20,000H(25% duty cycle)
	MTTR	0.34H
	Printer Life	5 million Line-Feed or 5 years
Print Head	Print Head Life	400million strokes (each wire)
Ink Ribbon	Ribbon Life (Black)	7 million characters (ANK Draft Quality)
Safety and EMI standard	UL / CSA / CE-LVD / GS / FCC / IC / CE-EMC / ENERGY STAR V2.0	

Common

Paper feeding	Continuous Form	Push tractor Rear in , and Top out	
	Cut Sheet	Rear in and Top out	
Paper	Cut Sheet	Width	95mm~267mm (3.75" ~ 10.5")
		Length	76mm~364mm(3.0"~14.3")
	Continuous Form	Width	95mm~267mm (3.75"~10.5")
		Length	101.6mm~364mm(4"~14.3")
Character Sets	Italic,PC437 (US),PC850 (Multilingual),PC851 (Greek),PC860 (Portuguese),PC863 (Canadian-French),PC865 (Nordic),PC852 (Eastern Europe),PC857 (Turkish),PC864 (Arabic),ISO_8859_7,PC866 (Russian),PC861 (Icelandic),BRASCII (Braz Portuguese),Abicomp (Braz Portuguese),MAZOWIA (Poland),KAMENICKY,ISO 8859-7(Latin/Greek), ISO 8859-15,Bulgaria,Roman 8,PC720,PC858,PC771,ISO 8859-9,PC1250,PC1251, PC1252,PC1253,PC1254,PC1257,OCR-B,ISO8859_1,ISO8859-2(ISO Latin2),CRO_ASCII, E_UK,E_US_ASCII,GREEK_DEC,E_SWEDEN,E_GERMAN,PORTUGUESE,COAX_TWINAX, E_FRANCE,E_ITALY,E_SPAINI,E_NORWAY,ELOT_928,TABLE_1252,TABLE_1253, TABLE_1254,NEW_437,NEW_DIG_850,TABLE_866,TABLE_737,TABLE_864,FARSI,URDO, OLD_CODE_860,FLARRO_863,TABLE_865,BULGARIA_866,		
Barcode	Code 3 of 9, UPC Type A, UPC Type A with check character, EAN13, EAN8, Interleaved 2 of 5, Code 128,Codabar(NW-7), Matrix 2 of 5, Industrial 2 of 5		
Resident Fonts	Bitmap Fonts : Roman, Sans Serif, Courier, Prestage elite, OCR-B, OCR-A, Orator, GOTHIC, Script, Draft, HS-Draft, Bold		

Model


Interface combination	USB
	USB+Parallel
	USB+Serial
	USB+LAN

*1 Maximum Graphics Resolution,Under ESC/P Emulation only



*2 About the trade mark

*3 Maximum copy ability is "Original + 5 carbonless copies" under specific paper conditions.

Company names and product names mentioned above are registered trade marks or trade marks of each company.
-Specifications are subject to change without notice.



Dimensions:DL3100

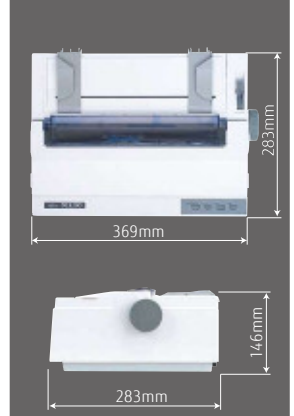

FUJITSU ISOTEC LIMITED

Printer Business Division
135,Higashinozaki,Hobara-machi,
Date-shi,Fukushima
960-0695, JAPAN.
Phone : +81-24-574-2236
Fax : +81-24-574-2382
URL : [http://www.fujitsu.com/
jp/fit/en/](http://www.fujitsu.com/jp/fit/en/)
Contact E-mail :
fit-gsm@cs.jp.fujitsu.com